

HSF RoHS FILE NO :E362810


SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Resistance To Soldering Heat:
260° C±5° C，10s(PA6T&PA9T&LCP insulator)

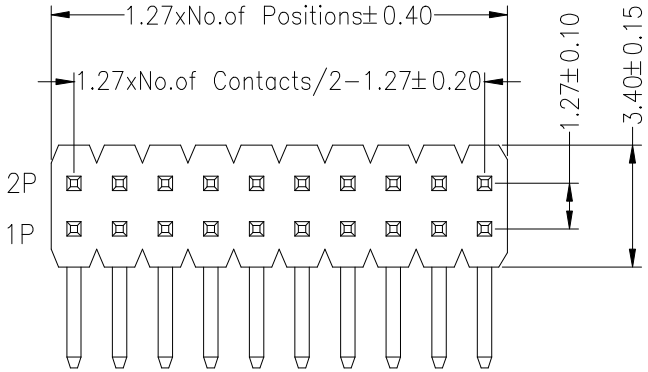

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

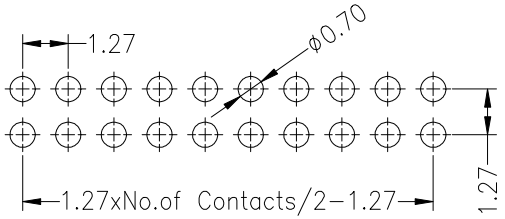

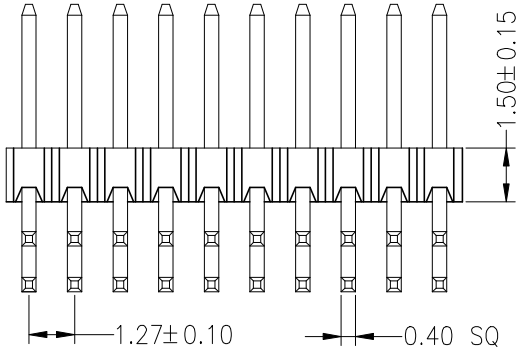

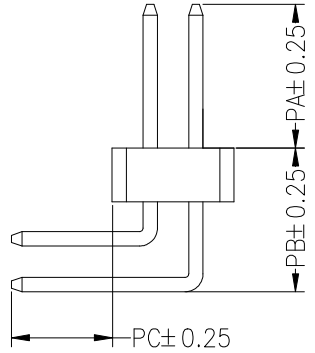

Ordering Information

1415 12 XX X N XX R XXX X XX

- 1415 12 — No.of Pins Per Row 02−50
- XX — Insulator Material Option: C=BK−PA6T; E=BK−PA9T; F=BK−LCP
- X — N
- XX — Contact Plating: G1:1u" Gold; G2:1.5u" Gold; G3:2u" Gold; G4:3u" Gold; G5:5u" Gold; G6:10u" Gold; G7:15u" Gold; G8:30u" Gold; S0:Gold Flash/Tin; SN:Tin
- R — Pin Length
- XXX — Packing: A=Tray; T=Tube
- X — code stream 01~99
- XX

Dimension antitheses list			
ITEM	PA	PB	PC
Standard	4.00	4.00	2.80

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.18	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	YiYuSheng	12.04.18
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳锦凌电子股份有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel：86-755-27483253 Fax：86-755-2997-5588

PART NO.	141512XXXNXXRXXXXXX
TITLE:	1.27PH H1.5mm 2xNpin 90°