

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Resistance To Soldering Heat:
260° C±5° C, 10s(PA6T&PA9T&LCP insulator)

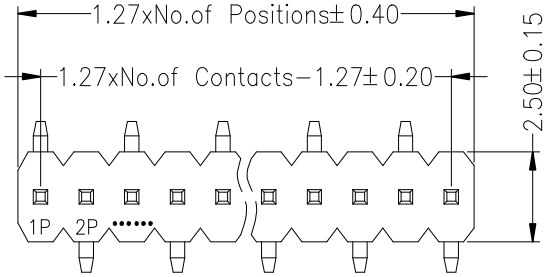

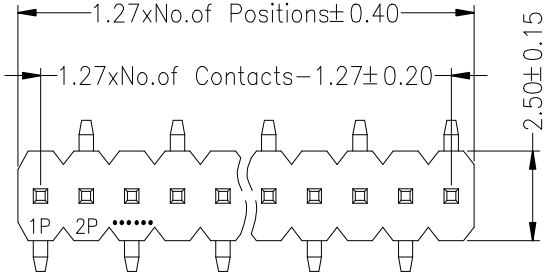


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

TYPE2

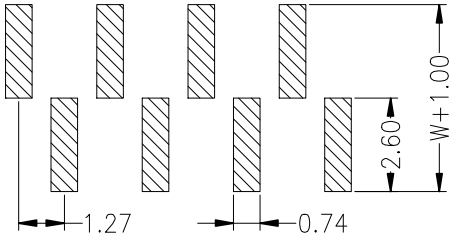


TYPE1

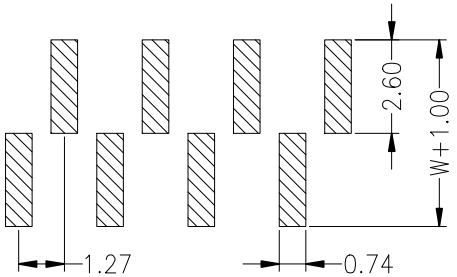


Ordering Information

1420 11 XX X N XX M XXX X XX

No.of Pins	Insulator Material Option	Post	Contact Plating	Pin Length	Packing	code stream
01~50	C=BK−PA6T E=BK−PA9T F=BK−LCP	W=With Post N=W/O Post	G1:1u" Gold G2:1.5u" Gold G3:2u" Gold G4:3u" Gold G5:5u" Gold G6:10u" Gold G7:15u" Gold G8:30u" Gold S0:Gold Flash/Tin SN:Tin		A=Tray T=Tube	01~99

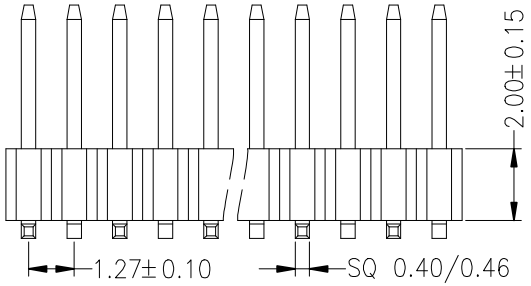



Dimension antitheses list				
ITEM	PA	PB	W	L
Alternate	4.00	2.50	4.20	8.20

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.18	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	YiYuSheng	12.04.18
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳锦凌电子股份有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel：86-755-27483253 Fax：86-755-2997-5588

PART NO.	142011XXXNXXMXXXXXX
TITLE:	1.27PH 1xNpin H2.0 SMT