

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 18A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Torque value : M3 , 0.6/5.3N·m/Lb.in
- 4.Wire range : 30~12AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4KV
Rate voltage(V)	320
Rate current(A)	15A

- 2.Torque value : M3 , 0.6/5.3N·m/Lb.in
- 3.Wire range : 0.2~2.5mm²

NOTES2:

- 1.Housing Material(塑件): PA66(A50H1) (UL94 V-0)
- 2.Four principles(四方针): Brass(黄铜), tin-plate(镀锡)

NOTES3:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.08mm, Poles : N=02~24P
- 3.Stripping length : 7mm
- 4.Operating temperature:-40℃~+105℃
- 5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm							
TO	Over	TO	TO	Over	TO	Over	TO	Over	TO	0.1/10
6	10	24	30	60	100	150	150	150	150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±1.30	±1.30	±2'

6.RoHS Compliance

Ordering Information






JL2EDGVJ-508 XX B 0 1

Pitch
508=5.08PH

No.of pins
2P,3P,4P~24P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
0=Pe bag
T=Tube
A=Tray

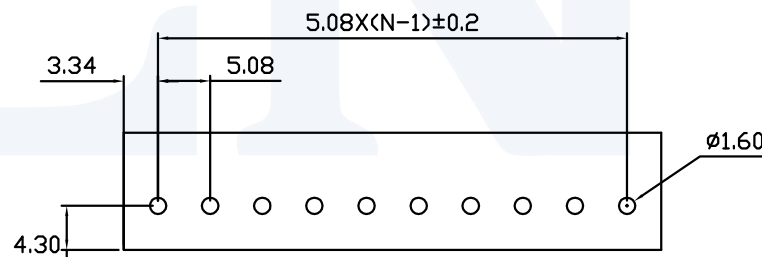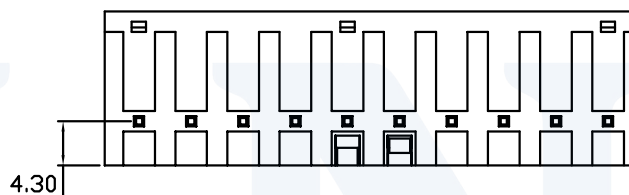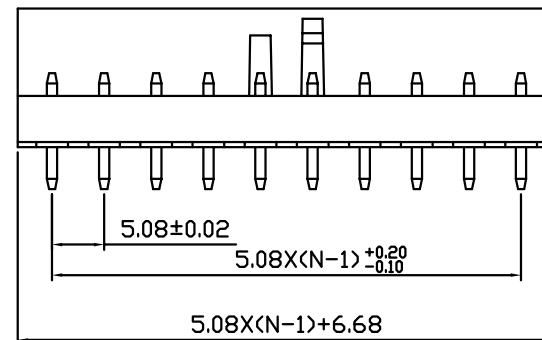

PCB LAYOUT

DRAW	SHUANGPING ZHENG	SCALE	FIT	JILN [®] 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD	
CHECK	LICHAD LIU	UNIT	mm		
APPROVE	YONGLIANG GAO	SIZE	A4	PART NO.	JL2EDGVJ-508XXB01
		SHEET	1/1	TITLE	JL2EDGVJ-5.08-XXP 插拔式公座/ 黑色
		PROJ.			