

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 30A
- 2.Withstanding voltage : AC1600V/1Min.

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4KV
Rate voltage(V)	400V
Rate current(A)	32A

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 7.62mm, Poles : N=02~12P
- 3.Operating temperature: -30°C~+120°C
- 4.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm							
TO	Over	TO	Over	TO	Over	TO	Over	TO	0.1/10
6	6 TO 10	10	10 TO 24	30	30 TO 60	60	60 TO 100	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

5.RoHS Compliance

Ordering Information





JL5EDGRM-762 XX G 0 1

Pitch
762=7.62PH

No.of pins
2P,3P,4P~12P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
0=Pe bag
T=Tube
A=Tray

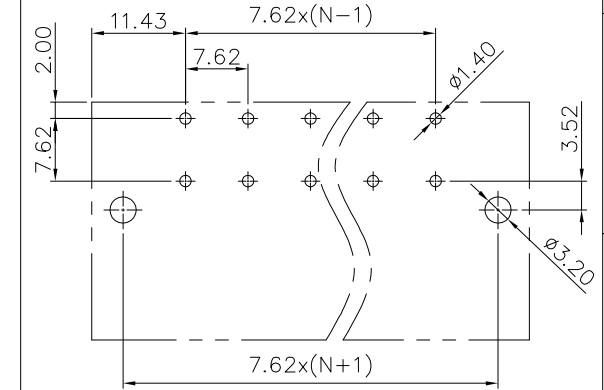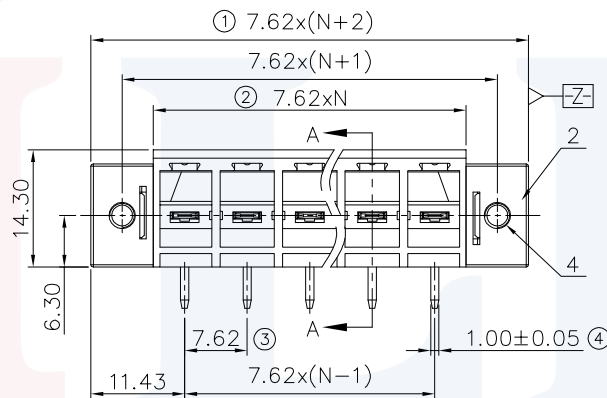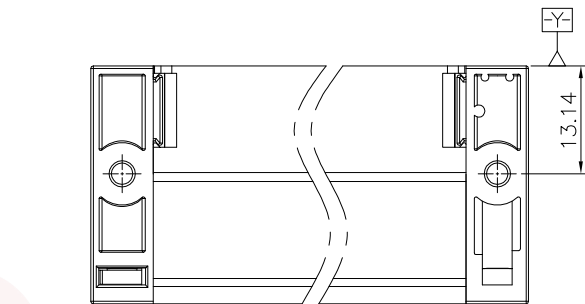

ITEM	NAME OF PART	MATERIAL	NOTES
4	Nut	Steel	M3/Zn Plated
3	Pin header	Copper	Sn Plated
2	Housing 2	PBT	UL94V-0
1	Housing 1	PBT	UL94V-0

DRAW	SHUANGPING ZHENG	SCALE	FIT
CHECK	LICHAD LIU	UNIT	mm
APPROVE	YONGLIANG GAO	SIZE	A4
		SHEET	1/1
		PROJ.	

JILN [®] 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD	
PART NO.	JL5EDGRM-762XXG01
TITLE:	JL5EDGRM-7.62-XXP 插拔式公座/ 绿色